

# BEST AVAILABLE COPY



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 233 237 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:

21.08.2002 Bulletin 2002/34

(51) Int Cl.7: F24C 7/00

(21) Application number: 01130542.2

(22) Date of filing: 04.03.1999

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE

(30) Priority: 04.03.1998 US 36003

05.06.1998 GB 9812084

13.10.1998 GB 9822247

(62) Document number(s) of the earlier application(s) in  
accordance with Art. 76 EPC:

99937977.9 / 1 082 576

(71) Applicant: Dimplex North America Limited

Cambridge, Ontario N1R 7G8 (CA)

(72) Inventors:

- Hess, Kristoffer  
Ontario N3H 3V1 (CA)
- O'Neill, Noel  
County Louth (IE)

(74) Representative: Harrison Goddard Foote

Belgrave Hall  
Belgrave Street  
Leeds LS2 8DD (GB)

### Remarks:

This application was filed on 20 - 12 - 2001 as a  
divisional application to the application mentioned  
under INID code 62.

### (54) Simulated fireplace assembly

(57) A fireplace assembly (10) includes a partially  
reflective vertical screen (16) with a diffusing back sur-  
face. A simulated fuel bed including simulated fuel and  
a simulated ember bed (24) is mounted in front of the  
screen. Light from a light source is reflected by a flicker

element (20) onto the diffusing back surface of the  
screen to provide an image of moving flames. A plurality  
of reflectors (34) is mounted on the simulated fuel and  
light from the light source is reflected from a second flicker  
element (20') to the reflectors (34) to provide an im-  
pression of glowing embers.

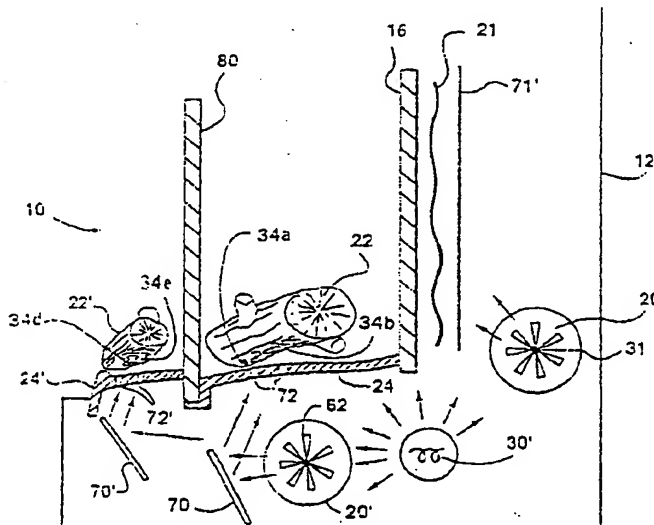


FIG. 6

## Description

### FIELD OF THE INVENTION

[0001] The present invention relates to components for electric or gas fireplaces and in particular to a simulated fuel bed, see, for instance, WO-A-9741393.

### BACKGROUND OF THE INVENTION

[0002] Simulated fuels beds are well known for use with electric or gas fireplaces. The fuel beds typically simulate combustible fuel, such as wood logs or lumps of coal, positioned upon an ember bed.

[0003] For electric fireplaces, simulated fuel beds are typically moulded from plastic, fibreglass and/or ceramic materials that are coloured or painted to resemble a combustible fuel arranged on a bed of embers. The appearance of glowing embers is provided by transmitting light from beneath the simulated fuel bed through coloured translucent panels on the body of the simulated fuel bed.

[0004] For gas fireplaces, the simulated fuel beds are typically formed from cast concrete, ceramics or other suitable flame retardant materials that are painted to resemble a combustible fuel arranged on an ember bed. Rock wool is disposed on parts of the combustible fuel and the ember bed. The wool is heated to incandescence by the gas flames in order to simulate burning embers on the ember bed and on the combustible fuel.

[0005] While the use of translucent panels or rock wool provides a reasonably realistic simulated effect of glowing embers, there is a continuing need to improve the effect.

### SUMMARY OF THE INVENTION

[0006] In one aspect, the invention provides a simulated fuel bed for a fireplace comprising:

- a simulated ember bed;
- a simulated combustible fuel; and
- at least one reflector mounted to at least one of said ember bed and said combustible fuel in a position to simulate a hot ember by reflecting light transmitted from a light source.

[0007] Advantageously, the reflector allows for embers to be simulated, in a cost-effective manner, on portions of the fuel bed that are not translucent (for instance, on solid ceramic logs).

### DESCRIPTION OF THE DRAWINGS

[0008]

Figure 1 is a front perspective view of an electric fireplace incorporating a simulated fuel bed in ac-

cordance with the present invention;

Figure 2 is a partial side view of the fireplace of Figure 1;

Figure 3 is an enlarged view of the portion of the fireplace indicated by arrow 3 in Figure 1 showing a first embodiment of reflector arrangement;

Figure 4 is an enlarged view of the portion of the fireplace indicated by arrow 3 in Figure 1 showing a second embodiment of reflector arrangement;

Figure 5 is a partial side view of a second embodiment of the fireplace of Figure 1; and

Figure 6 is a partial side view of a third embodiment of the fireplace of Figure 1.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0009] A simulated fuel bed in accordance with the present invention is shown generally at 10 in Figs. 1-6. The fuel bed 10 is shown incorporated within an electric fireplace 12.

[0010] The preferred electric fireplace 12 produces a simulated image 14 of flames between the fuel bed 10 and a reflected image 10' of the fuel bed 10. The electric fireplace 12 includes a translucent screen 16 having a partially reflecting surface 18 located immediately behind the fuel bed 10 for producing the reflected image 10' of the fuel bed 10. The simulated image 14 of flames is created by reflecting light from a flicker element 20 located behind the screen 16 and transmitting the reflected light through a diffusing region 21 on the screen 16. More detail concerning the structure of the preferred embodiment of electric fireplace 12 is provided in U.S. Patents 4,965,707 and 5,642,580. It should be understood however that the invention is intended to be used, with necessary modifications, with other types of electric fireplaces as well as with gas fireplaces.

[0011] Referring to Figs. 1 and 2, it may be seen that the fuel bed 10 has a simulated combustible fuel 22, a simulated ember bed 24 and a real or simulated grate 26. The combustible fuel 22 is preferably formed from an expanded polystyrene material and coloured to resemble wood logs. The ember bed 24 is preferably formed from a plastic material having red, orange or yellow coloured translucent portions 28 to resemble an ember bed for the logs. The grate 26 is preferably formed from a metal or ceramic material and coloured if necessary to resemble the metallic material of a real fireplace grate. The grate 26 is optional and the fuel bed 10 may be only made up of the combustible fuel 22 and ember bed 24. It will be understood that the elements 22, 24 and 26 of the fuel bed 10 may be constructed from any materials that accurately simulate the element in a cost effective and functionally practical manner.

[0012] As shown in Figure 2, a light source 30 such as one or more light bulbs is positioned underneath the simulated fuel bed 10. Light from the light source 30 is transmitted through the coloured translucent portions 28

of the ember bed to give the illusion of burning embers. Light from the light source is also transmitted toward the flicker element 20 where it is reflected toward the rear of the screen 16 to produce the simulated image 14 of flames. The flicker element 20 is preferably rotatable about its centre axis 31 so that the simulated flames 14 appear to flicker (as described in more detail in U.S. Patent 5,642,580). In the case where the fuel bed 10 is incorporated within a gas fireplace, the light source 30 could simply comprise the gas flames produced by the fireplace.

**[0013]** A plurality of reflectors 34 are disposed in an ember pattern 33 on parts of the combustible fuel 22 of the fuel bed 10 to reflect light that is transmitted from the light source 30. The reflection of light from the reflectors 34 gives the illusion of burning embers on the combustible fuel. The reflectors 34 may also be disposed on parts of the ember bed 24 where it is otherwise difficult to give the illusion of hot embers by transmitted light through coloured translucent portions 28. For instance, red coloured reflectors 34 may be mounted to an upwardly facing surface of the ember bed 24 to reflect light from a light source located at the top of the fireplace (not shown).

**[0014]** The reflectors 34 are mounted to the fuel bed 10 using a pressure sensitive glue (such as double-sided tape), a hot melt glue or any other suitable fastener that withstands the temperature associated with the electric or gas fireplaces. It has been found that double-sided tape allows a plurality of reflectors 34 to be applied at one time to a desired portion of the fuel bed 10. A transfer decal (not shown) is formed with the reflectors arranged in an ember pattern 33 as described further below. The sticky side of the decal is then peeled off so the decal can be mounted to the fuel bed 10. The remaining portion of the decal that does not form the reflectors 34 is then peeled away so that all that remains is the reflectors 34 arranged in the ember pattern 33. This allows the reflectors to be mounted to the fuel bed 10 in a cost effective manner with a precise arrangement of reflectors 34 in the ember pattern.

**[0015]** Referring to a first embodiment depicted in Figure 3, it can be seen that a plurality of reflectors 34, each polygonal in shape, are arranged in the ember pattern 33 with two opposing sides 36 of each reflector 34 extending generally parallel to the simulated grain 38 for the simulated combustible fuel 22. The reflectors 34 are arranged relative to each other such that they follow the grain 38. Wood logs for instance have a grain that extends longitudinally along the log. Lumps of coal also include a grain, although its direction is not apparent from the shape of the lump of coal. The ember pattern 33 of reflectors 34 includes non-reflecting spaces 40 between reflectors 34 to simulate cracks that would be found between embers on a burning fuel. The spaces 40 are generally uniform in width. The size and shape of the reflectors 34 varies however although most of the reflectors 34 will be generally trapezoidal in shape.

**[0016]** Referring to a second embodiment of reflector 34' depicted in Figure 4, it can be seen that a single reflector 34' is provided which includes a plurality of reflective regions 41 and non-reflective regions 43. The shape and size of the respective regions 41 and 43 corresponds to the shape and size of the individual reflectors 34 and spaces 40 described in Figure 3 above. The non-reflective regions 43 of the reflector 34' are formed by etching or by applying a paint, ink or other suitable non-reflective materials to the surface of a reflector 34.

**[0017]** It will be noted in Figure 2 that the reflectors 34 are positioned in a number of distinct locations on the combustible fuel 22. Reflectors 34a are positioned along a downwardly facing front surface 37 of a foreground log 39. Reflectors 34b are positioned along a downwardly facing rear surface 45 of the foreground log 39. Reflectors 34c are positioned along an upwardly facing rear surface 42 of a background log 44. The background log 44 is split such that it will appear as an entire log when combined with its reflected image 44' observed in the reflective surface 18 of screen 16. The foreground log 39 similarly has a reflected image 39'.

**[0018]** As shown in Figure 2, depending upon their location, reflectors 34a, 34b and 34c each function differently in reflecting light from light source 30 to produce an illusion of embers. Reflectors 34a and 34b reflect light 46 that has been coloured by passing through the translucent portions 28 of the ember bed 24. Light from reflectors 34a is directly observable by a viewer 48 located in front of the fireplace. Light from reflectors 34b is indirectly observable since the light must first be reflected again on the reflecting surface 18 of screen 16 before reaching the eye of the viewer. Reflectors 34c reflect light 50 that is transmitted through the diffusing region 21 of the screen 16. Light from reflectors 34c is indirectly observable by the viewer 48 since the light must first be reflected by the reflecting surface 18 of screen 16 before reaching the eye of the viewer. Any flickering of the simulated flame 14 that is reflected by the reflector 34c gives the enhanced illusion of corresponding changes of heat intensity for the simulated ember.

**[0019]** The reflectors 34 are each formed from a suitable reflective material such as a highly reflective metallic foil. A thin foil of chromed MYLAR™ or metalised polyester has been found to be a suitable material. A red, orange or yellow coloured reflective foil is preferred for reflectors 34c to enhance the colour of the reflected light. A silver coloured reflective foil is preferred for reflectors 34a and 34b where the incident light has already been coloured. While foil is currently preferred for forming the reflectors 34, it is also contemplated that reflective glass or other reflective materials may be substituted. For instance, in gas fireplace applications, it may be necessary to utilise a heat resistant mirrored glass for the reflectors 34 where it is found that a foil is affected by the high temperatures. The fuel bed 10 for gas fireplaces of course would also be required to be made from

suitable heat resistant materials as known in the art.

[0020] In addition to the reflectors 34, it has been found that an enhanced fuel bed effect is generated by randomly sprinkling minute flecks 60 of reflective material on the combustible fuel 22 and ember bed 24. The flecks 60 are formed of a similar reflective metallic foil as is preferred for forming the reflectors 34. The flecks 60 are sufficiently minute in size (two millimetres or less in width) to give the illusion of a sparkling ash. Due to the minute size and random distribution of the flecks (which are disposed in a variety of different angular orientations on the fuel bed 10 to reflect light from different angles above and below the flecks 60), the viewer 48 observes random sparkles of light from the fuel bed 10 for brief instances of time (since the sparkle will disappear when the viewer 48 moves slightly such that the angle of observed reflected light changes). The flecks 60 may be treated with a glue before being sprinkled upon the fuel bed 10 or the fuel bed 10 may be sprayed with a clear adhesive substance prior to sprinkling of the flecks 60.

[0021] Referring to Figure 5, a second embodiment of simulated fuel bed 10 is shown. For convenience, corresponding elements from the embodiment described above are assigned the same reference numerals.

[0022] In the second embodiment of fuel bed 10, a flicker element 20' is located beneath the ember bed 24 for reflecting light from a light source 30'. The flicker element 20' has a similar construction to the flicker element 20 located behind the screen 16 as described above, and as described in US 4,965,707 and US 5,642,580. The flicker element 20' includes a plurality of reflective strips 62 extending from an axis 31'. The flicker element 20' is caused to rotate about the axis 31' by means of an electric motor (not shown). The rotation of the flicker element 20' produces moving beams of light from a light source 30' that are subsequently transmitted to and reflected by reflectors 34a, b to give the impression of burning embers of differing heat intensity.

[0023] Referring to Figure 6, a third embodiment of the fuel bed 10 is shown. Again, for convenience, corresponding elements from the embodiments described above are assigned the same reference numerals.

[0024] In the third embodiment of fuel bed 10, a flicker element 20' and a static reflector 70 are located beneath the ember bed 24. Light from the light source 30' may be transmitted to the reflectors 34a, b directly or by reflection by the flicker element 20' further by the static reflector 70. By virtue of its rotation, the flicker element 20' produces moving beams of light which, when reflected in reflectors 34a, b provide the observer with the impression of glowing embers and ashes, the appearance of which is constantly changing, with different areas constantly becoming more and less intensely illuminated.

[0025] The ember bed 24 also includes a plurality of light transmitting apertures 72. The apertures 72 will generally have a diameter (if generally circular) or a width of between 4 and 20mm, preferably between 6

and 12mm and especially about 8mm. The reflectors 34a, b are of a size generally equivalent to the size of apertures 72.

[0026] The combustible fuel 22 and the ember bed 24 are so arranged that light reflected from the flicker element 20' may pass (via the static reflector 70) through the apertures 72 onto the reflectors 34a, b.

[0027] The apparatus of the invention will desirably include a transparent or translucent front screen 80 which may be of glass or other suitable material such as a plastic. Preferably, the front screen 80 will be tinted (or "smoked") so that when the light source 30' is not switched on, the interior of the apparatus is not visible to the observer.

[0028] In order to enhance the visual effect provided by the apparatus of the invention, the depth of the simulated hearth may be increased by providing an additional simulated fuel bed 24' and at least one additional simulated combustible fuel piece 22' with reflectors 34d and 34e in front of the screen 80. An additional static reflector 70' is then provided to reflect light directly from the light source 30' and from the flicker element 20' onto the reflectors 34d and 34e.

## Claims

1. A fireplace assembly (10) having:

a substantially vertical translucent screen (16) having a partially reflective front surface and a diffusing back surface;

a simulated fuel bed positioned in front of the screen (16), the simulated fuel bed having a partially translucent simulated ember bed (24) including translucent portions (72) and simulated combustible fuel (22) disposed over the simulated ember bed (24);

a light source (30') disposed underneath the simulated fuel bed (10);

a first flicker element (20) disposed behind the screen (16) for reflecting light from the light source (30') to the diffusing back surface of the screen (16) such that an image of flames is visible in the screen (16);


a plurality of reflectors (34) disposed on the simulated combustible fuel (22); and

a second flicker element (20') disposed beneath the simulated ember bed (24) for reflecting light from the light source (30') upwardly through the translucent portions (72) to the reflectors (34) to simulate a plurality of burning embers.


2. A fireplace assembly (10) as claimed in claim 1 additionally comprising a grate (26) disposed above the simulated ember bed (24), the simulated combustible fuel (22) being disposed over the grate.

3. A fireplace assembly (10) as claimed in claim 1 or 2 wherein the translucent portions of the simulated ember bed (24) include a plurality of light transmitting apertures (72). 5
4. A fireplace assembly (10) as claimed in claim 3 wherein the apertures (72) have a width of from about 4mm to about 20mm.
5. A fireplace assembly (10) as claimed in claim 3 or 4 wherein the reflectors (34) are disposed adjacent to the apertures (72) and the respective widths of the reflectors (34) are substantially the same as the corresponding respective widths of the apertures (72). 10  
15
6. A fireplace assembly (10) as claimed in claim 3 or 4 further comprising at least one static reflector (70) for reflecting light from the light source (30') directly or from the flicker element (20') upwardly through the translucent portions (72) of the simulated fuel bed (22). 20
7. A fireplace assembly (10) as claimed in any preceding claim further comprising: 25
  - a substantially vertical translucent second screen (80) disposed in front of the simulated fuel bed;
  - a second simulated fuel bed positioned in front of the second screen (80) and having a second partially translucent simulated ember bed (24') including translucent portions (72') and second simulated combustible fuel (22') disposed over the second simulated ember bed (24'); 30  
35
  - a plurality of second reflectors (34) disposed on the second simulated combustible fuel (22'); and
  - a second static reflector (70') positioned beneath the second simulated ember bed (24') whereby light from the light source (30') is reflected by the second flicker element (20') to the second static reflector (70') and further reflected from the second static reflector (70') through the translucent portions (72') to the second reflectors (34) to simulate a plurality of burning embers. 40  
45
8. A simulated fuel bed (10) as claimed in claim 7 wherein the translucent portions of the second simulated ember bed (24') include a plurality of light transmitting apertures (72'). 50
9. A simulated fuel bed (10) as claimed in claim 8 wherein apertures (72') have a width of from about 4mm to about 20mm. 55
10. A simulated fuel bed (10) as claimed in claim 8 or 9

wherein the reflectors (34) are disposed adjacent to the apertures (72') and the respective widths of the reflectors (34) are substantially the same as the corresponding respective widths of the apertures (72').

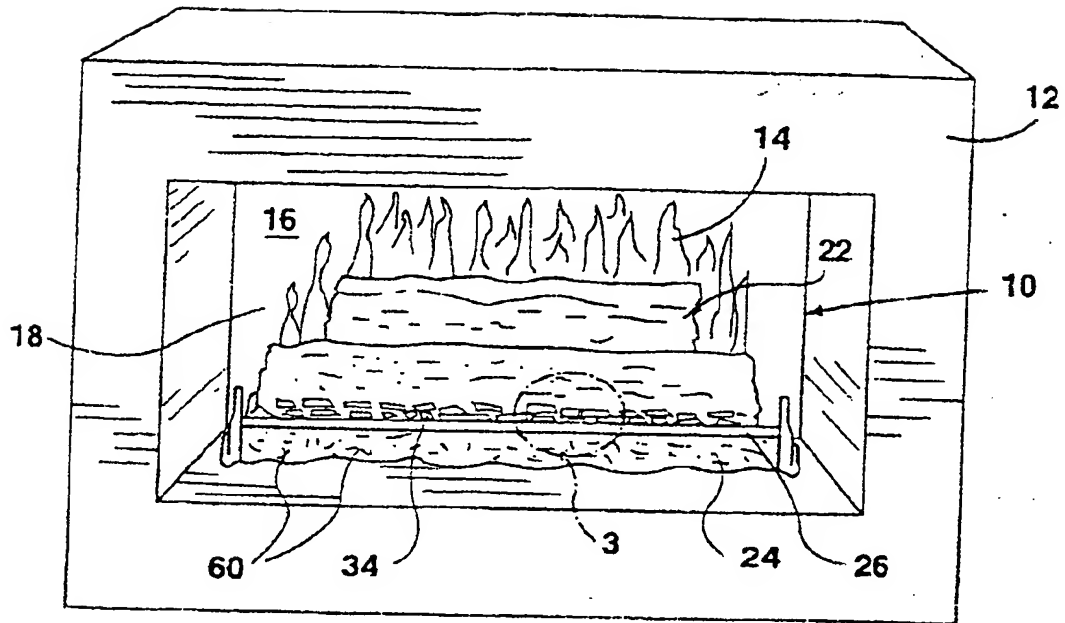

**FIG. 1**

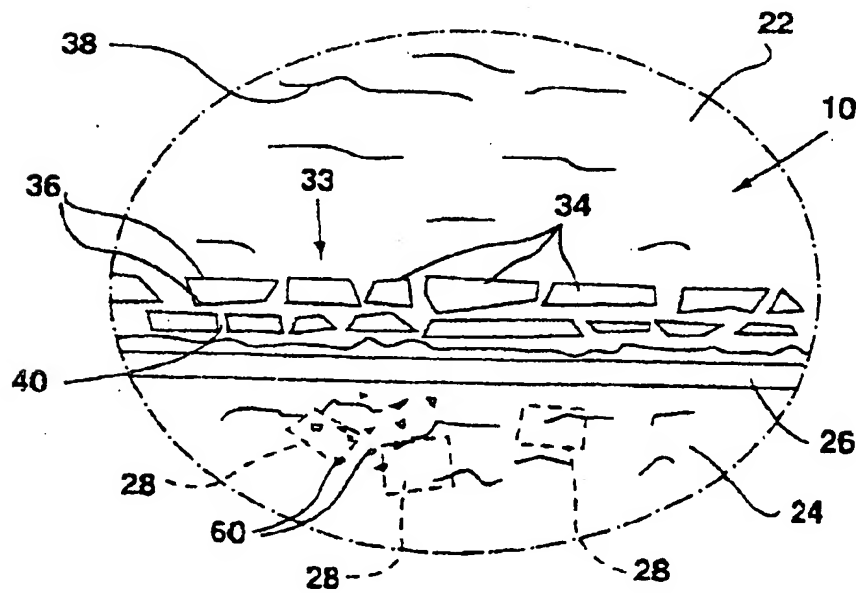

**FIG. 3**

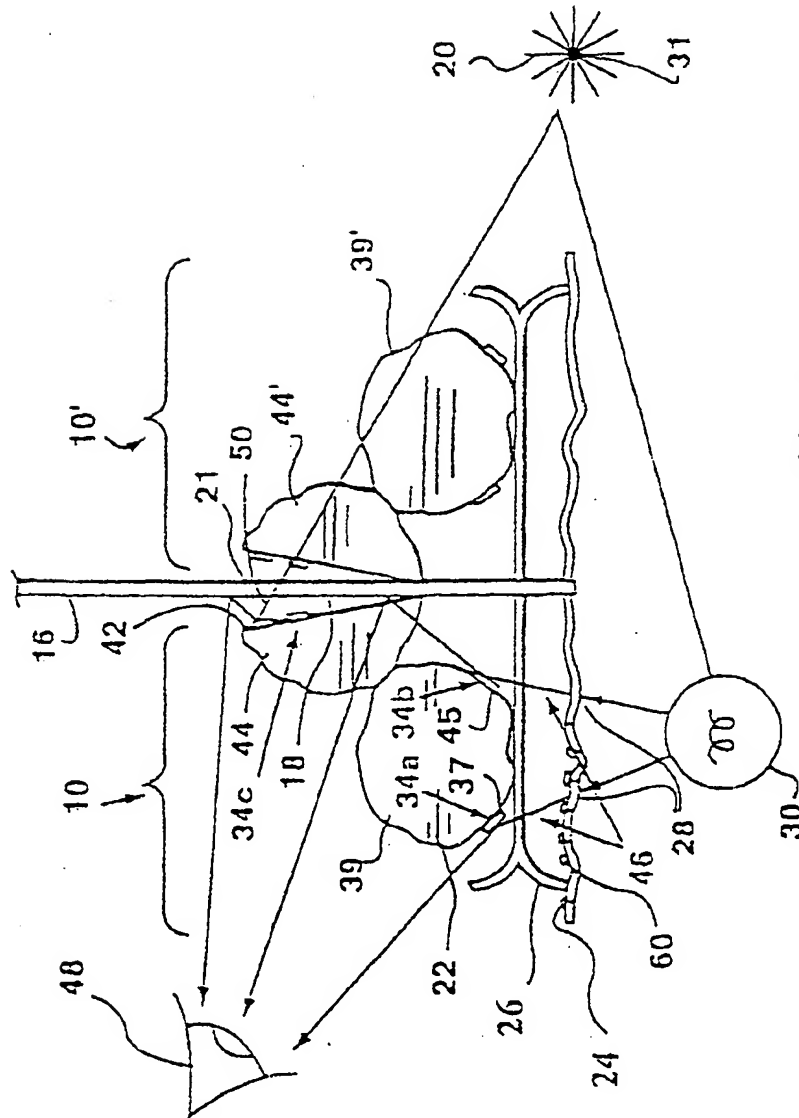


FIG. 2

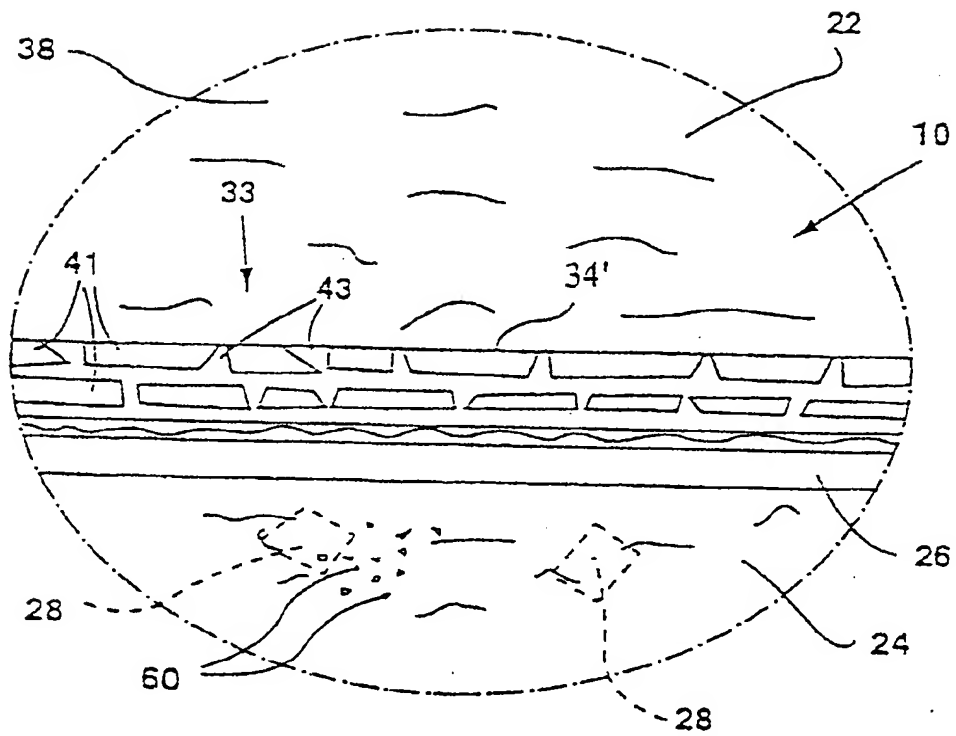


FIG. 4



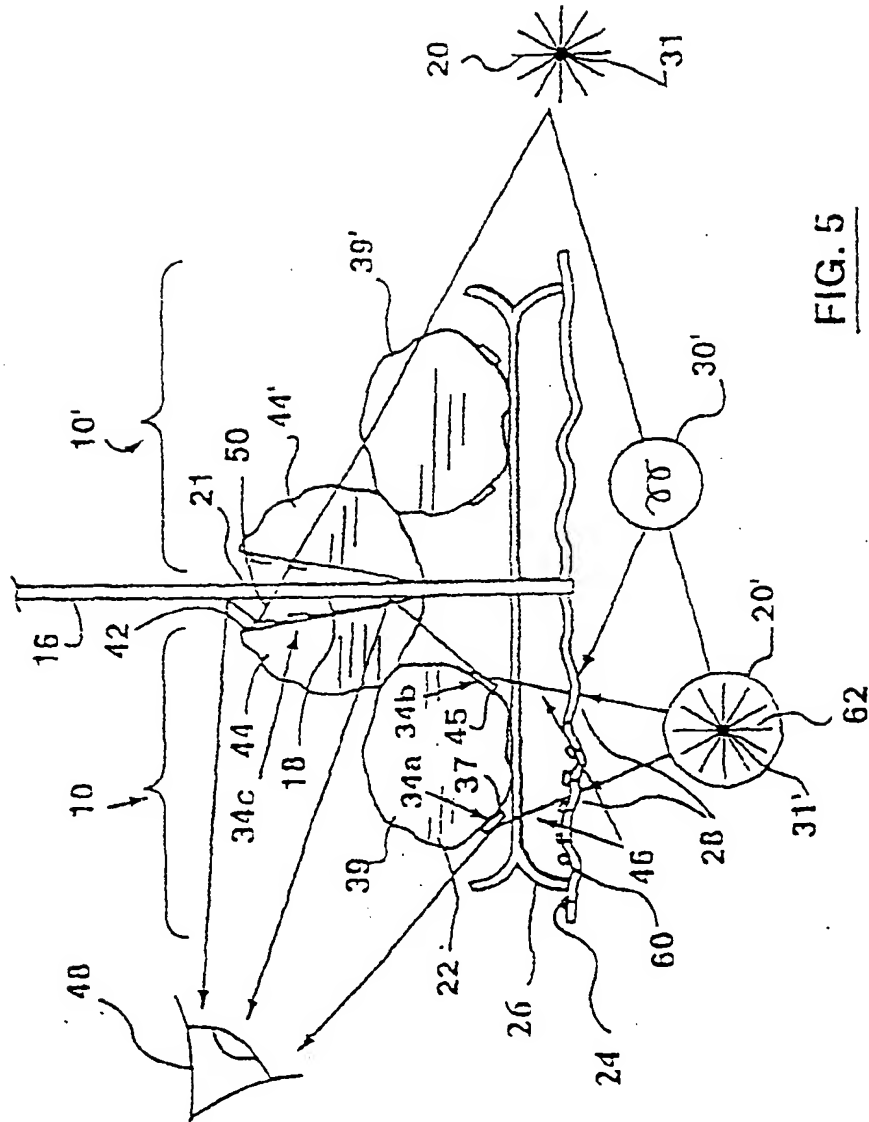


FIG. 5

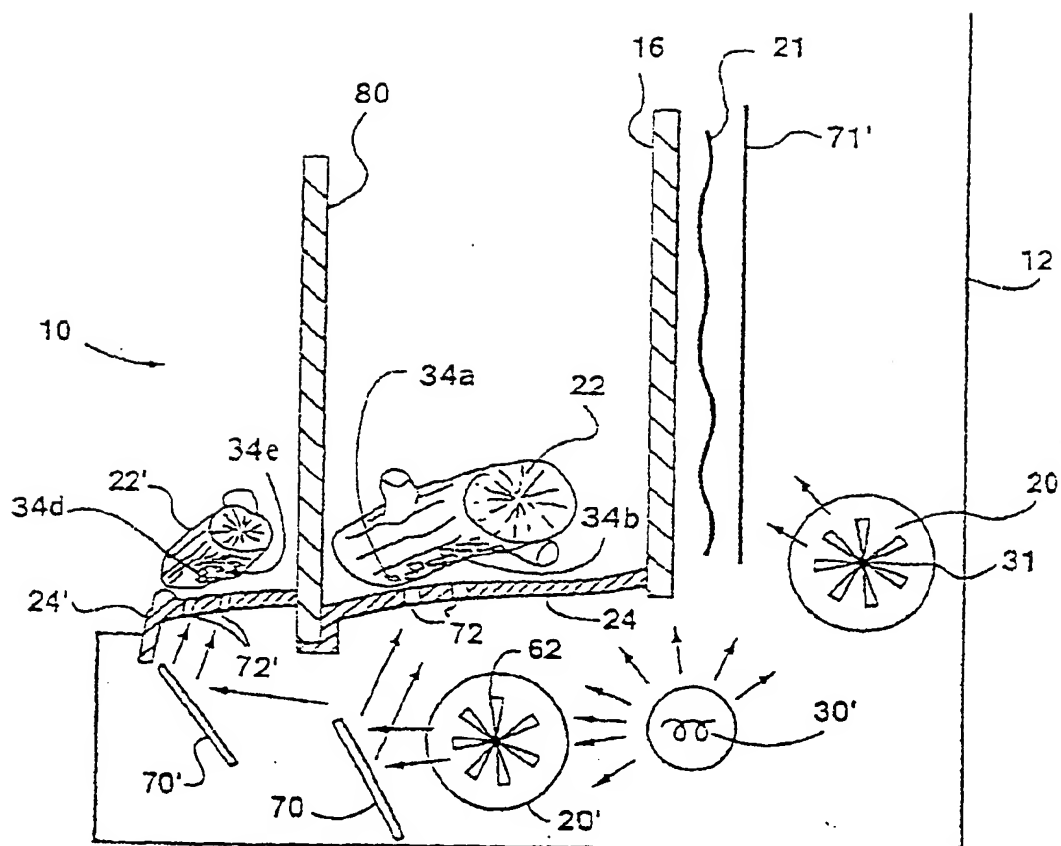


FIG. 6



## EUROPEAN SEARCH REPORT

Application Number  
EP 01 13 0542

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	GB 1 443 772 A (TI SUNHOUSE LTD) 28 July 1976 (1976-07-28)	1,2	F24C7/00
A	* the whole document *	3-10	
Y	WO 97 41393 A (DIMPLEX NORTH AMERICA LIMITED ; HESS KRISTOFFER (CA); MACPHERSON DA) 6 November 1997 (1997-11-06) * the whole document *	1,2	
A	GB 2 298 073 A (BITECH ENG) 21 August 1996 (1996-08-21) * the whole document *	7	
A	GB 1 024 047 A (FROST & COMPANY LTD H) 30 March 1966 (1966-03-30) * the whole document *	1	
A	US 4 965 707 A (BUTTERFIELD BRIAN J) 23 October 1990 (1990-10-23) * the whole document *	1	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	US 4 026 544 A (PLAMBECK H ROBERT ET AL) 31 May 1977 (1977-05-31) * the whole document *	1	F24C
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 15 May 2002	Examiner Filtri, G

**CATEGORY OF CITED DOCUMENTS**

X : particularly relevant if taken alone  
Y : particularly relevant if combined with another document of the same category  
A : technological background  
U : non-written disclosure  
P : intermediate document

T : theory or principle underlying the invention  
E : earlier patent document, but published on, or after the filing date  
D : document cited in the application  
I : document cited for other reasons

\* : member of the same patent family, corresponding document

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 13 0542

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-05-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 1443772	A	28-07-1976	NONE	
WO 9741393	A	06-11-1997	CA 2175442 A1	31-10-1997
			US 6047489 A	11-04-2000
			AU 734355 B2	14-06-2001
			AU 2377797 A	19-11-1997
			CA 2204106 A1	30-10-1997
			CA 2310073 A1	30-10-1997
			CA 2310343 A1	30-10-1997
			CA 2310362 A1	30-10-1997
			CA 2310367 A1	30-10-1997
			CA 2310414 A1	30-10-1997
			WO 9741393 A1	06-11-1997
			EP 1199524 A2	24-04-2002
			EP 1199525 A2	24-04-2002
			EP 1199526 A2	24-04-2002
			EP 1199527 A2	24-04-2002
			EP 0897514 A1	24-02-1999
			JP 2001509873 T	24-07-2001
			NZ 333010 A	26-05-2000
			PL 329604 A1	29-03-1999
			US 6269567 B1	07-08-2001
GB 2298073	A	21-08-1996	NONE	
GB 1024047	A	30-03-1966	NONE	
US 4965707	A	23-10-1990	AU 621713 B2	19-03-1992
			AU 4931390 A	16-08-1990
			GB 2230335 A, B	17-10-1990
			IE 63651 B1	31-05-1995
			NZ 232435 A	25-06-1991
US 4026544	A	31-05-1977	CA 1068736 A1	24-12-1979
			CA 1077982 A2	20-05-1980

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**